


BULK CURRENT INJECTION

The F-080915-1008-1 has been designed to extend the use of conducted immunity testing over the bandwidth of 3.0 GHz – 4.0 GHz. It combines high efficiency, high power rating, and compact size, supporting testing of individual cable harnesses during benchtop testing as well as cable harnesses inside vehicles.

Per standard substitution method test methods used in ISO 11451—4/ISO 11452-4, Mil-Std. 461/462 Rev D/E, and FAA DO-160 Rev D/E. The F-080915-1008-1 requires 20 watts to develop up to 300 mA into a calibration fixture with a 100 Ω loop line impedance.

The F-080915-1008-1 offers distinct advantages and benefits:

- Broad bandwidth. <9 dB attenuation 3 – 4 GHz into a 100 Ω loop line impedance.
- Useable up to 250 watts
- Accommodates EUT cables up to 32 mm in diameter

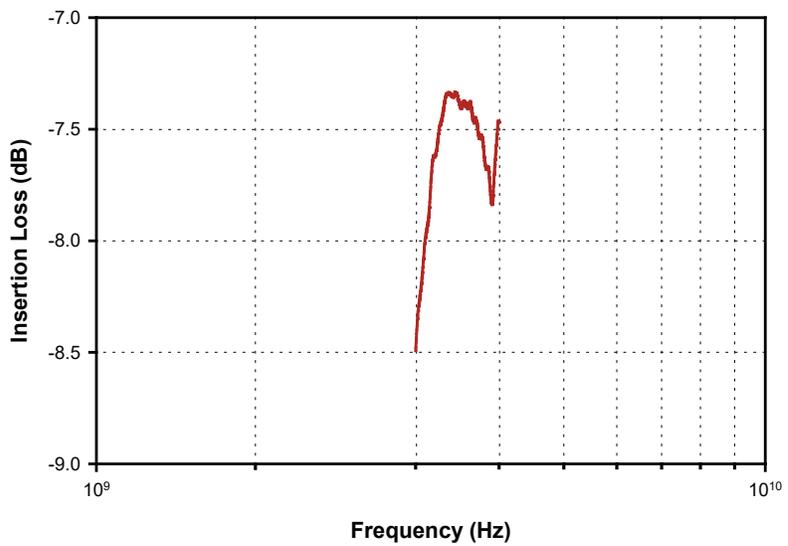

Specifications

Frequency:	3.0 GHz – 4.0 GHz
Inner Diameter:	32 mm
Outer Diameter:	71 mm
Height:	19 mm
Input Power rating:	250 watts

Accessories

- F-080915-1008-2 • Calibration Fixture
Bandwidth: 3.0 GHz – 4.0 GHz
- F-170601-1005-1 • Current Probe
Bandwidth: 3.0 GHz – 4.0 GHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.