


# F - 120-6A-3

## BULK CURRENT INJECTION

The F-120-6A-3 is a broadband, high efficiency injection probe. Large RF currents can be coupled on to a signal or power circuit under test between 10 kHz – 400 MHz.

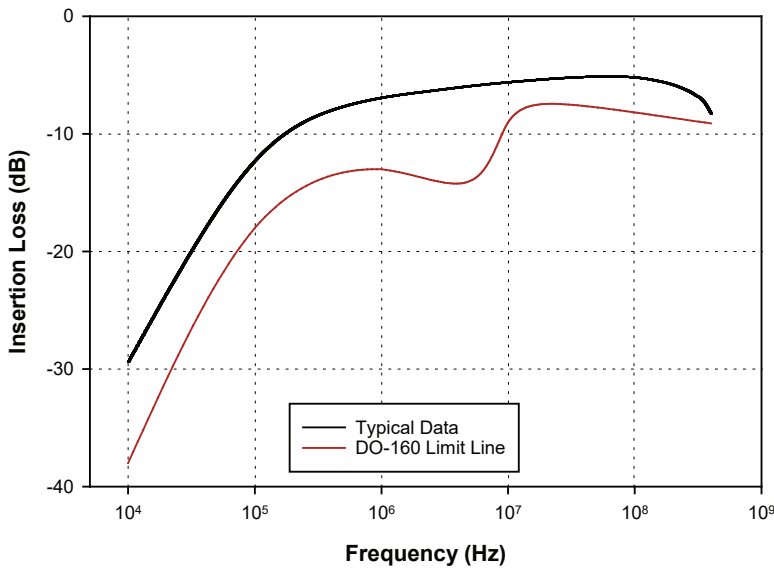

### Specifications

Frequency: 10 kHz – 400 MHz  
Inner Diameter: 32 mm  
Outer Diameter: 94 mm  
Height: 64 mm  
Input Power rating: 100 watts (30 minutes)  
150 watts (15 minutes)  
200 watts (5 minutes)

### Accessories

FCC-BCICF-1 • Calibration Fixture  
Bandwidth: 10 kHz – 400 MHz  
F-51A • Current Probe  
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA  
90502 Phone: 310-303-330  
Email: sales@ischercc.com

© Fischer Custom Communications, Inc.