


# F - 140-HV

## BULK CURRENT INJECTION

The F-140-HV is used for BCI testing in accordance with DO-160, section 20, as well as Pulse Inductive Damped Sinusoid testing in accordance with DO-160, section 22.

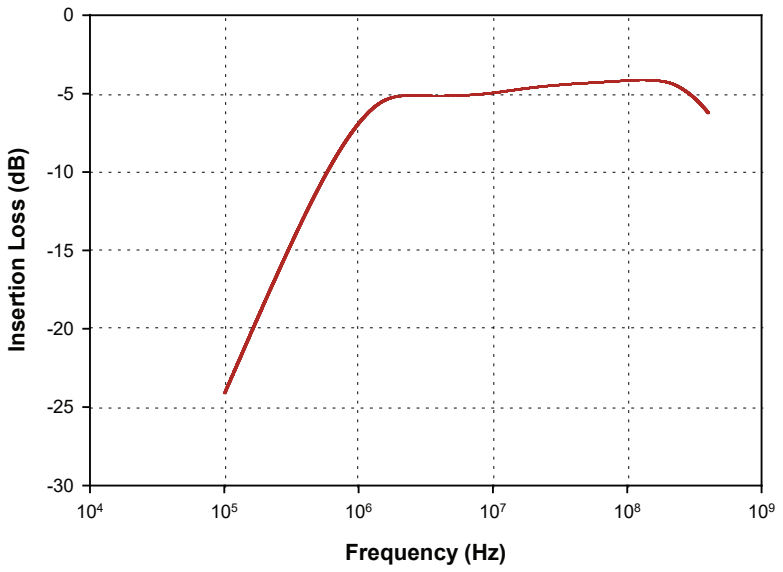

### Specifications

- Frequency: 100 kHz – 400 MHz
- Inner Diameter: 40 mm
- Outer Diameter: 127 mm
- Height: 70 mm
- Input Power rating: 100 watts
- RF Connector: HN Female

### Accessories

- FCC-BCICF-1-HV • Calibration Fixture  
Bandwidth: 10 kHz – 400 MHz
- F-52-40 mm • Current Probe  
Bandwidth: 10 kHz – 400 MHz



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300

Email: [sales@fischercc.com](mailto:sales@fischercc.com)

© Fischer Custom Communications, Inc.