


F - 161012-1008-1

BULK CURRENT INJECTION

The F-161012-1008-1 is a high efficiency Injection Probe used primarily for low frequency conducted susceptibility testing. The input power rating is 2.5 kW for 30 minutes.

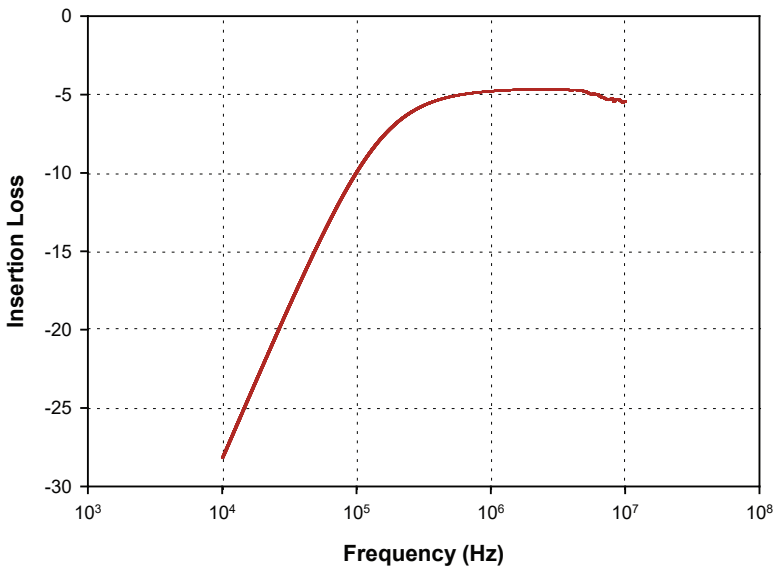

Specifications

Frequency: 10 kHz – 10 MHz
Coupling Window: 54 mm x 108 mm
Weight: 55 kg
External Diameter:
Width: 203 mm
Height: 241 mm
Length: 305 mm
Input Power rating: 24 watts

Accessories

F-161012-1008-2 • Calibration Fixture
Bandwidth: 10 kHz – 10 MHz
F-14A • Current Probe
Bandwidth: 100 Hz – 10 MHz
Internal Diameter: 65 mm
Transfer Impedance: 0.013 Ω



Fischer Custom Communications, Inc.

20603 Earl St., Torrance, CA 90503
Phone: 310-303-3300
Fax: 310-371-6268
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.