


F - 170329-1005-1

CURRENT PROBE

The F-170329-1005-1 has a usable frequency range of 10 kHz – 30 MHz. Primary power currents of 1000 amperes DC – 400 Hz will not alter its transfer impedance.

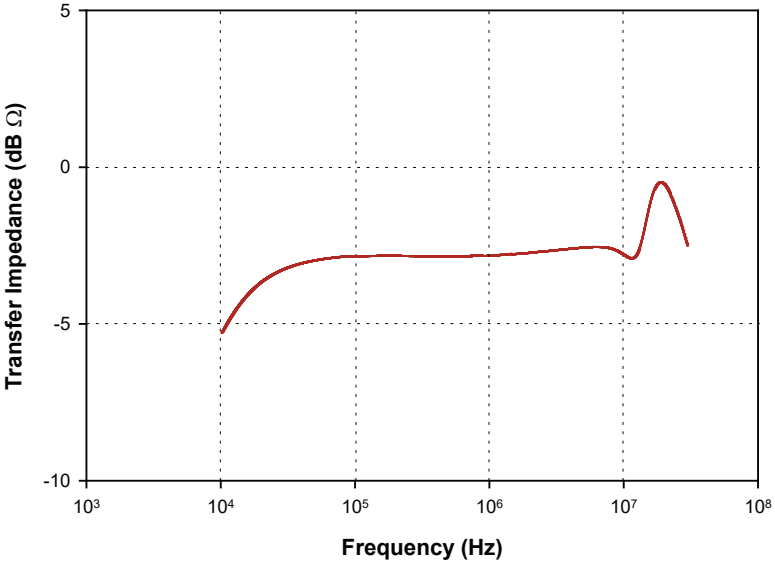

Specifications

Frequency:	10 kHz – 30 MHz
Internal diameter:	67 mm
External diameter:	142 mm
Height:	53 mm
ZtΩ ¹ :	1.4
dBΩ ² :	3
Connector:	Type-N
DC to 400 MHz:	1000 amperes
RF(CW):	2 amperes

1: Probe calibrated with 50 Ω + j0Ω Load Impedance.
2: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300

Email: sales@fischercc.com

© Fischer Custom Communications, Inc.